

# SJE PUMPMASTER® Pump Switch

Mechanically-activated, wide-angle switch designed for direct control of pumps up to 1/2 HP at 120 VAC and 1 HP at 230 VAC.

This mechanically-activated, wide-angle pump switch provides automatic control of pumps in:



- water
- sewage applications

The SJE PumpMaster® pump switch is not sensitive to rotation or turbulence allowing it to be used in both calm and turbulent applications.



## FEATURES

- Heavy-duty contacts.
- Controls pumps up to 1/2 HP at 120 VAC and 1 HP at 230 VAC.
- Adjustable pumping range of 7 to 36 inches (18 to 91 cm).
- Includes standard mounting clamp and boxed packaging.
- UL Recognized for use in water and sewage.
- CSA Certified.
- Five-year limited warranty.

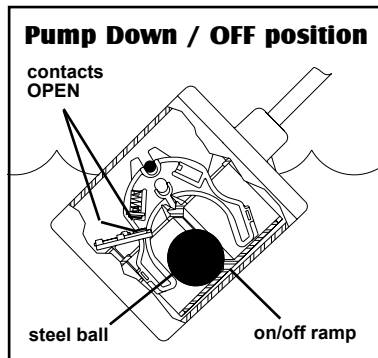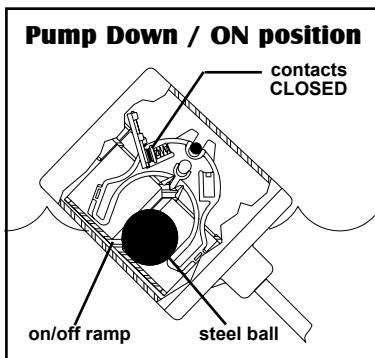

## OPTIONS

This switch is available:

- for pump down or pump up applications as specified by part number.
- with a 120 VAC or 230 VAC piggy-back plug.
- without a plug for direct wiring in 120 VAC or 230 VAC applications.
- in standard cable lengths of 10, 15, 20, or 30 feet and 3, 5, 6, or 10 meters (longer lengths available).

## SPECIFICATIONS

**CABLE:** flexible 16 gauge, 2 conductor (UL, CSA) SJOW, water-resistant (CPE)

**FLOAT:** 3.05 inch diameter x 3.56 inch long (7.75 x 9.04 cm) high impact, corrosion resistant, PVC housing for use in sewage and water up to 140°F (60°C)

### ELECTRICAL:

#### 120 VAC 50/60Hz Single Phase:

**Maximum Pump Running Current:**

13 amps

**Maximum Pump Starting Current:**

85 amps

**Recommended Pump HP:**

1/2 HP or less

#### 230 VAC 50/60Hz Single Phase:

**Maximum Pump Running Current:**

13 amps

**Maximum Pump Starting Current:**

85 amps

**Recommended Pump HP:**

1 HP or less

**NOTE:** This switch must be used with pumps that provide integral thermal overload protection.

SEE BACKSIDE FOR ORDERING INFORMATION.

**SJE**  
**Rhombus**

PO Box 1708, Detroit Lakes, MN 56502

1-888-DIAL-SJE • 1-218-847-1317

1-218-847-4617 Fax

email: customer.service@sjerhombus.com

**www.sjerhombus.com**

F.3